

Overview


The **Phones** page defines provisioned phones, device models, MAC addresses, line assignments, and provisioning secrets. Open it from **Configuration > Provisioning > Phones**.

The page works against the tenant currently selected in the top bar. The screenshots and demo rows were captured in the **Canistracci OIL** tenant.

The phone record also includes a **Description** field for internal notes. The value is informational only and is not used when generating provisioning files, registering phones, or routing calls.

The phone record also includes a **Description** field for internal notes. The value is informational only and is not used when generating provisioning files, registering phones, or routing calls.

The phone record also includes a **Description** field for internal notes. The value is informational only and is not used when generating provisioning files, registering phones, or routing calls.

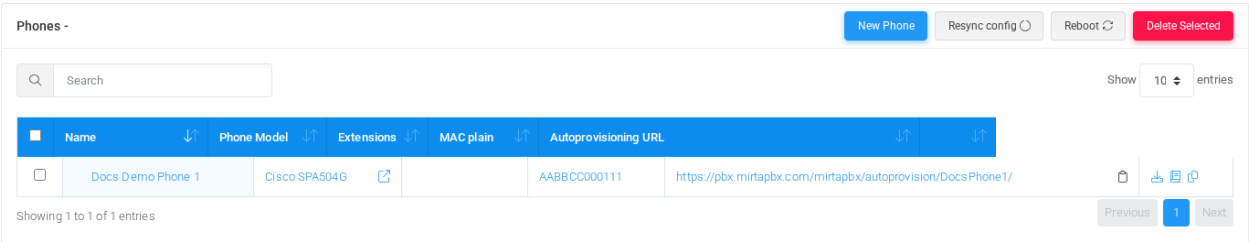

Phones list page in the Canistracci OIL tenant.

Working with objects

Task	How to do it
Add	Select the New phone action, complete the form, and select Save.
Edit	Open the phone from the list by selecting its name, number, or row action. Change the form and select Save.
Delete	Select the row checkbox and use Delete Selected, or open the phone and select Delete, then confirm.

Page functions

Action	Description
New Phone	Opens the creation form for a new phone.
Resync config	Sends the selected device operation to the selected phones.
Reboot	Sends the selected device operation to the selected phones.
Delete Selected	Deletes the selected rows after confirmation.

List columns

Column	Description
Name	Display name used in lists and references.
Phone Model	Object setting shown by the form.
Extensions	Target or routing selection used when the object sends a call or message onward.
MAC plain	Object setting shown by the form.
Autoprovisioning URL	Object setting shown by the form.

Demo records

The tenant contains 1 documentation demo record for this page: Docs Demo Phone 1.

Deleting records

Before deleting a phone, check references from call flows, destinations, schedules, reports, or provisioning objects. MiRTA PBX asks for confirmation before the delete is submitted.

Revision #11

Created 2026-06-02 12:15:17 UTC by Admin

Updated 2026-06-21 10:40:32 UTC by Admin